


Utility Pressure Gauges

“POINTER” utility gauges are designed for long & reliable service under rugged condition.

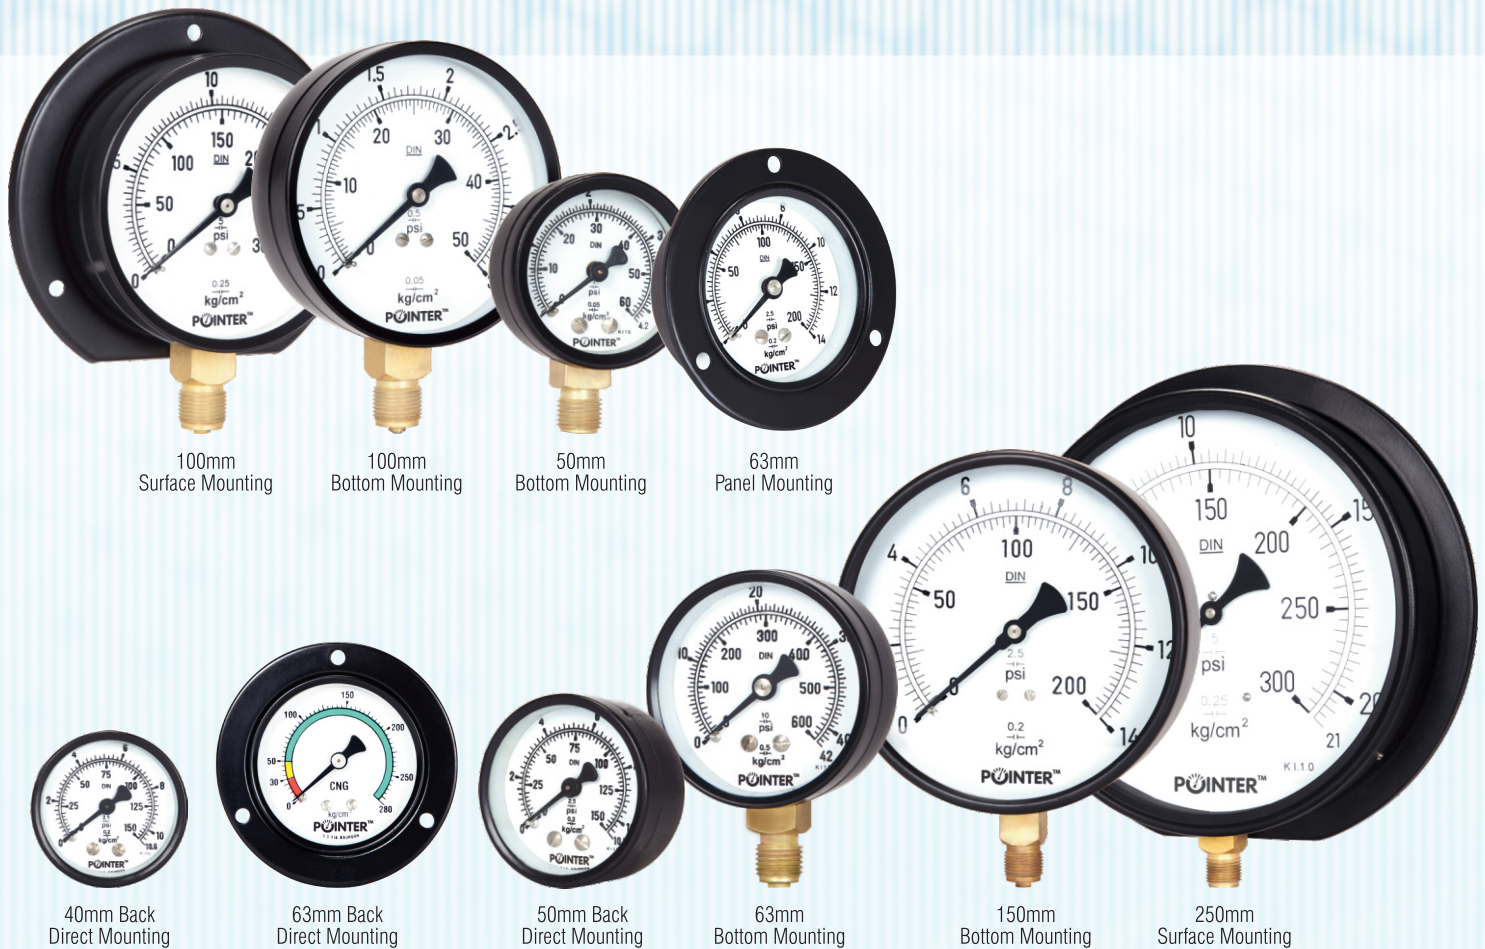

CONSTRUCTION FEATURES

Dial Size	: 40mm, 50mm, 63mm, 100mm, 150mm & 250mm.
Accuracy	: $\pm 2\%$ of full scale.
Case & Bezel	: Drawn steel black painted press fit type.
Movement	: Brass
Pressure Element	: Brass (≤ 70 bar 'C' Type) SS 316 (> 70 bar Coil Type).
Socket	: Brass
Dial	: Aluminum white painted with 270 degree black scale marking.
Pointer	: Aluminum pointer with black finish.
Window	: Plain glass
Over Load Protection	: 125% of f.s.d. for ≤ 150 Kg/cm ² 115% of f.s.d. for > 150 Kg/cm ² .
Joints	: Soldering
Mounting	: Stem (Bottom), Surface, Panel Mounting, Flush Panel (Bracket Type).
Connection	: 1/8", 1/4" / 3/8" / 1/2" BSP / NPT
Scale Range	: Vacuum & Pressure up to 700 kg/cm ²

OPTIONAL FEATURES

- Ammonia (NH₃), Oxygen(O₂), Freon Scale available on request.

APPLICATION

Pneumatic control Systems, Air conditioning, Pumps etc....

POINTER INSTRUMENTS PVT. LTD.

210, Phase-1, G.I.D.C. Industrial Estate, Chhatral-382 729. Tal.: Kalol, Dist.: Gandhinagar, Gujarat, INDIA.
Ph.: +91 2764-234357 | E-mail: sales@pointer.in, pointer210@yahoo.co.in, info@pointer.in | Web: www.pointer.in

